

MERIROAD
RC-6000 STG/DTG

For versatile crushing



MERIROAD

MERIROAD

RC-6000 STG/DTG

For versatile crushing

MERIROAD WORKING ENVIRONMENTS

- Crushing the ground before stabilizing,
- Preparing the subsoil for laying sett (car parks, roads, residential areas)
- Recycling of old cobbled and gravel roads, - Stabilization of grounds down to a depth of 30 cm on all types of roads, with easily accessible materials like cement, polimers, ash, dolomite, lime,
- Construction and redoing of forest roads, communal roads, drives to agricultural areas.
- Building outdoor feed pads

EQUIPMENT

FEATURES

- Fixed counter blades
- Hardox liner (frame)
- STB Rotor with carbide cutters
- POC - Pressure operated safety clutch (SUOKONE patented)
- Possibility to turn the rotor

OPTIONS

- Hydraulic Top Link




MERIROAD

RC-6000 STG/DTG

For versatile crushing

Base machine demand	RC-6150 STG / DTG	RC-6190 DTG	RC-6220 STG / DTG	RC-6240 DTG
Four wheel tractor				
Mounting	CAT 3	CAT 3	CAT 3	CAT 3
Auxiliary hydraulic	2 pcs. 2-way	2 pcs. 2-way	2 pcs. 2-way	2 pcs. 2-way
PTO	1000 rpm	1000 rpm	1000 rpm	1000 rpm
Working speed	Creeper gear	Creeper gear	Creeper gear	Creeper gear
Technical data:				
Power range	130—300 hv	130—300 hv	130—300 hv	150—300 hv
Transmission	Mechanical PTO	Mechanical PTO	Mechanical PTO	Mechanical PTO
Final gear	Gear (G-serie)	Gear (G-serie)	Gear (G-serie)	Gear (G-serie)
Clutch	POC - 3	POC - 3	POC - 3	POC - 3
Rotor diameter	600 mm / 24 inch	600 mm / 24 inch	600mm / 24 inch	600 mm / 24 inch
Rotor width	1550 mm / 61 inch	1950 mm / 77 inch	2250 mm / 89 inch	2450 mm / 96 inch
Cutter qty, STB-F	72 pcs	92 pcs	106 pcs	116 pcs
Working depth	300 mm / 12 inch	300 mm / 12 inch	300 mm / 12 inch	300 mm / 12 inch
Main dimensions:				
Lenght	1650 mm / 65 inch	1650 mm / 65 inch	1650 mm / 65 inch	1650 mm / 65 inch
Widht STG / DTG	1830 / 1920 mm 72 / 76 inch	2320 mm / 91 inch	2530 / 2620 mm 100 / 103 inch	2820 mm / 111 inch
Height	1370 mm / 54 inch	1370 mm / 54 inch	1370 mm / 54 inch	1370 mm / 54 inch
Weight	1590 / 1740 kg 3510 / 3840 lbs	1940 kg / 4280 lbs	1940 / 2140 kg 4280 / 4720 lbs	2340 kg / 5160 lbs
Weight with options	1850 / 2000 kg 4080 / 4410 lbs	2200 kg / 4850 lbs	2200 / 2400 kg 4850 / 5290 lbs	2600 kg / 5730 lbs

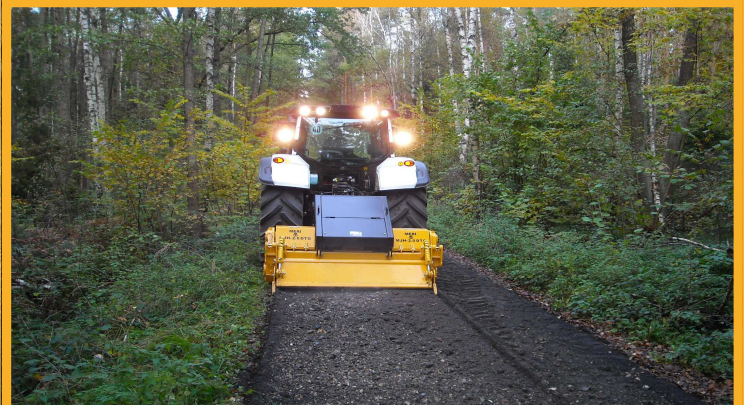

SUOKONE OY
88610 Vuokatti
FINLAND

tel. +358 8 666 2011
suokone@suokone.com
www.mericrusher.com

